


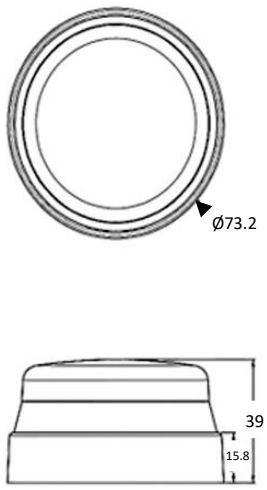

The NEMA PE Cell for the MultiFit series of LED streetlights allows for the light to automatically turn on at dusk and back off at dawn automatically.

The sensor is only compatible with the SLM series of MultiFit streetlights that is already fitted with the matching NEMA socket. Simply remove the shorting cap and replace it with the PE cell for automatic ON/OFF control of the light

Specification		Dimensions
Model	SLM-PE	
Rated Voltage	100~277VAC	
Time Delay	3-15 Seconds	
Rated Current	10A	
Electrical Life	>10,000 ON/OFF Operations	
Colour	Black	
Operating Temp	-40°C~60°C	
Protection Rating	IP66	
Turn-On Light Levels	On: 10lux, Off: 60lux	
Power Consumption	<1w	
Housing Material	Polycarbonate	
Dimension	Ø73.2mm x 39mm	
Warranty	5 Years	

Specifications are subject to change without notice