




RAPID RESPONSE 200

DUCTED CEILING EXHAUST FAN

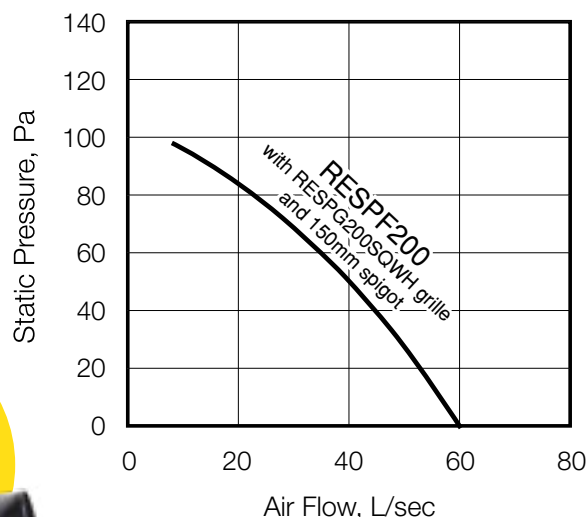


The ultra quiet Rapid Response 200 series header box exhaust fan is ideal for odour and dampness removal from toilets, powder rooms, laundries and cupboards.

- Advanced impeller and housing design provides powerful air flow with minimal noise.
- Can be retrofitted into an existing standard 200mm round fan cut out.
- Low resistance non-return backdraft damper maximises air flow performance.
- Matching grilles are easy to remove, which makes cleaning easy.
- Includes sealed for life ball bearings.
- High strength swing clips and removable spigot makes installation easy.
- Available with a modern square or round grille (See page 34-35). Square grille can be easily rotated to align with walls.
- Available with 3-15 minute NCC2022 compliant** adjustable run-on timer (RESPF200ROT).
- Comes with spigot to suit both 100mm and 150mm duct.
- Rated "Continuous Run".
- Includes plug and lead for easy installation

Standard model (RESPF200) includes a 3-pin plug and lead to suit HPM 37CL, or Clipsal 413-WE bases (with 3-pin sockets).

Timer model (RESPF200ROT) includes a 4-pin plug and lead to suit HPM 33, or Clipsal 413/4P-WE bases (with 4-pin sockets).

DIMENSIONS

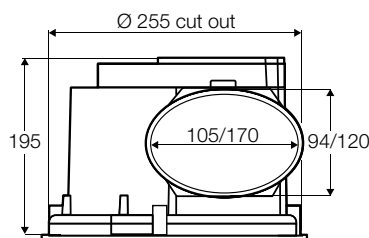

All dimensions in mm
Spigots suitable for 100mm/150mm duct included.

SPECIFICATIONS


MODEL NO.	DESCRIPTION	AIR FLOW M ³ /HR†	AIR FLOW L/SEC†	FAN SPEED RPM	AVG. dB(A) @ 3M	WATTS	VOLTS
RESPF200	Fan body	216	60	950	29	30	230-240
RESPF200ROT	Fan body with run-on timer						

† Air flow with Rapid Response internal grille (RESPG200SQWH) attached and without ducting or additional fittings.

REPLACEMENT PARTS


MODEL NO.	DESCRIPTION
RESPF200SPIG150	150mm removable spigot

ACCESSORIES

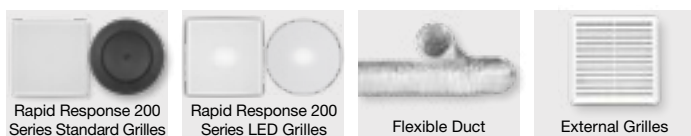

*Conditions apply. For details visit: fantechtrade.com.au/warranty

**Compliant with requirements of NCC 2022 Vol 1 Part F8D4 and ABCB Housing Provision Part 10.8.2, when correctly installed.



Scan the QR code to see fan features.