

Technical Data Sheet:	DS064/0512
Product Description	FSU Contractor Pack: PVC coated galvanised steel flexible Conduit with 5x fixed & 5x swivel nickel plated brass fittings & 10x Locknuts
Product Range	FSU - Flexible Conduit Contractor Pack

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham
B46 1HG
Tel: 00 44 (0)1675 466900



Website: www.flexicon.uk.com




Size	Part No.
20mm	FSU-CP20B

FSU Contractor Pack

- 10 Metres of FSU Galvanised steel with PVC coating conduit
- 5 M20 Fixed Fittings
- 5 M20 Swivel Fittings
- 10 Steel Locknuts



FSU Conduit with Swivel Fitting

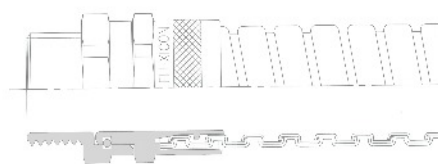

Conduit

Nominal Size	OD (mm)	Min ID (mm)	Min inside Bend radius R (mm)
20	21.6	16.8	45

Fixed Fitting

Metric Thread	Nominal Dimension (mm)				
A	B	C	D	E	
M20 X 1.5	10.0	15.3	26.3	24.0	

Swivel Fitting

Metric Thread	Nominal Dimension (mm)					
A	B	C	D	E	F	
M20 X 1.5	10.0	15.3	35.5	24.0	24.0	

Material:

Conduit:
Galvanised Steel Conduit with PVC coating

Fittings:
Nickel Plated Brass

Colour:
Conduit:
Black.

Fittings:
Self Colour

Fire Performance:

Self extinguishing

IP Rating:

- IP54

Applications

FSU conduit provides high mechanical strength and is highly flexible.

Ideal for use for general factory wiring and connections to machines.

Conduit fittings suitable for knockouts

Supplied with 10x Locknuts

Temperature Performance:

-15°C to +70°C

Compliance, Approvals & Accreditation;



IEC EN 61386

EN 61386 Classification Available on request

Typical Applications;



Machinery and OEM's



Construction

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Colin Legg - Marketing Manager	Approved by; Ian Gibson - Technical Director	Date; May 2012	Page Number; Page 1 of 1
--	--	--------------------------	------------------------------------