
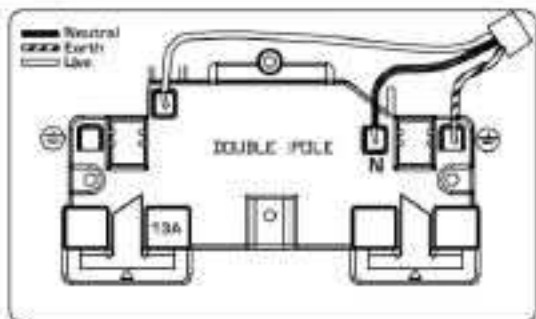


Hamilton HARTLAND 2 GANG
FOR DOUBLE-POLE
SWITCHED SOCKET

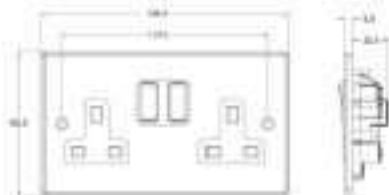

Order Code :
74 SS2 SS-W

Hartland Satin Steel 2 gang 13A Switched
Socket - Double Pole. Standard Insert will be
Satin Steel with a White surround.

Attributes

Primary Range	Hartland
Insrt	SS2
Plate material	Metal
Size (double) height	85mm
Size (double) width	144mm
Size (double) depth	5mm
Box fixing hole centres	120.6mm
Grid fixing hole centres	Grid fixing inserts are available on Hartland plates. For full details refer to GRID-IT technical pages and GRID-IT catalogue.
Minimum wall box depth	35mm
Current rating	13 Amp
Voltage	220/250V AC
Max load	13 Amp
IP rating	IP2XD
Switched Poles	Double
Contact Gap Minimum	3mm
Terminal Capacity 1	4 x 2.5mm ²
Terminal Capacity 2	3 x 4mm ²
Terminal Capacity 3	2 x 6mm ² Multi-Strand
Terminal Capacity 4	1 x 10mm ²
Earth Terminal Capacity 1	4 x 2.5mm ²
Earth Terminal Capacity 2	3 x 4mm ²
Earth Terminal Capacity 3	2 x 6mm ² Multi-Strand
Earth Terminal Capacity 4	1 x 10mm ²
Product Class 1	Must be earthed
Ambient Operating Temperature	-5Å° to +40Å°C
Recommended Location	Indoor use only
Max installation Altitude	2000m
BS EN ISO Standard	BS 1363-2
Patents And Trademarks	Trade Mark No. 2344778