SPECIFICATION SHEET

Product Ref:

MSU6316

Metal Consumer Unit with 63A RCD and 16A MCB

Features:

- Complete with fully fitted and pre-wired 2 pole 63A 30mA RCD device and a 16A MCB Type B
- Ferruled cable ends for secure connections
- Fully enclosed metal construction body with drop-down metal cover. Raised keyholes for secure easy installation
- Multiple circular cable entry knockouts top and bottom (M25 and M40) plus rear aperture/rounded cable entry
- Finished in white polyester powder coating to RAL9010
- BS 7671 Amendment 3:2015 and BS EN 61439-3 compliant

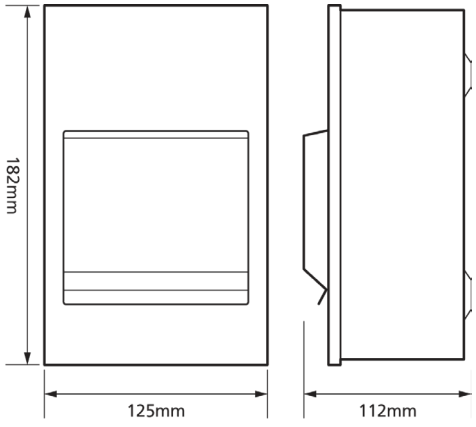

Specification

Voltage Rating	**230V**
Current Rating	**63A**
RCD Rating	**63A**
IP Rating	**IP20**
Weight	**1.385kg**
Width	**125mm**
Height	**182mm**
Depth	**112mm**
Incoming Device	**63A 30mA RCD**
Number of Outgoing ways	**1**
Supplied With	**1 x 63A 30mA 2 Pole RCD and 1 x 16A MCB Type B**
Tripping Sensitivity	**30mA**
Cable Entry	**Knockouts (M25 and M40)**
Mounting	**Surface**
Colour	**White**
Finish	**Polyester Powder Coated**
Material	**Steel**
Compliance	**CE**
Guarantee	**1 Year**
Standards	**BS 7671 Amendment 3:2015, BS EN 61439-3**

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.