
13A Socket with USB Charging Ports

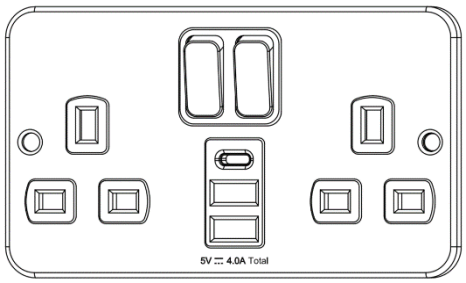

Description

13A Socket with high current Type A and Type C USB charging ports, for simultaneous charging of smart phones, tablets and other portable devices.

This range is easy to install, with clear bold terminal markings and is supplied in individual protective bags suitable for display

Features

- 2 Type A and 1 Type C USB ports deliver a maximum combined output of 4A
- All three ports can deliver a maximum of 3A charging current
- Simultaneous charging across 3 ports
- USB ports use auto IC technology to detect connected devices and provide optimised high-speed charging
- 2-year guarantee

Range

Back boxes with knockouts

2 gang switched with Type A and Type C USB charging ports	M1288

Technical Specification

Supply voltage		240Vac
Socket rating		13A
Switch		Single Pole
USB ports output		4.0A shared
Standby power		<0.5W
Contact gap		3mm
Size	2g	146mm x 86mm
Depth		46mm

Switches control 13A sockets, not USB charging ports

No user serviceable parts

Back Boxes

All knockouts are 20mm diameter

	Back boxes with knockouts	
	Sides	Back
2g	8	1

Terminal Capacity

	1mm²	1.5mm²	2.5mm²	4mm²
L & N	4	3	2	1

Standards

- BS 1363
- BS 5733
- BS EN 60950-1

Deta Electrical Company Ltd.
UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT UK
EU: Unit 16 Ashbourne Industrial Estate Ashbourne Co. Meath A84 W972 Ireland
Tel. +44 1582 544 548 technical@deta.co.uk

DS 0288 V1.0 07/2021 NPD 0615