


IRP Far-Infrared Panel Heaters

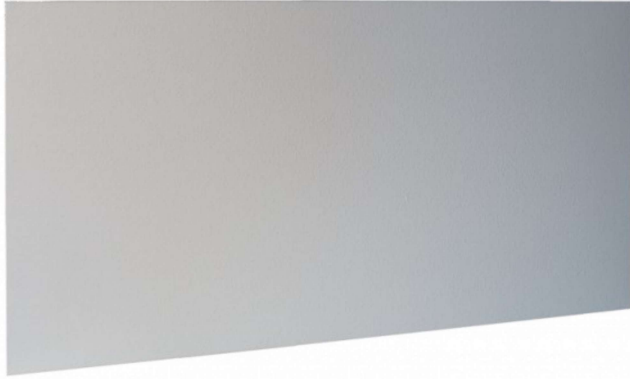

Technical Details

Controls	No controls on panel—MUST BE USED IN CONJUNCTION WITH DIMPLEX DTB-2R CONTROLLER.
Construction	Powder coated sheet metal
Element	IRP300 & IRP600 - Foil IRP850 - Cable
Installation	Wall, ceiling (fixing kit included in packaging)
Safety	Safety cut out
IP Rating	IP44
Battery Backup	No battery required.
Supply	1 metres fitted 1/N/PE -230 V, 50 Hz Class 1 with earth wire
Colour / Finish	White

Warranty & Approvals

Approvals	CE, UKCA
Guarantee	2 Years (+3 with registration)
Country of Origin	Czech Republic
Manufacturer	Glen Dimplex Heating & Ventilation (GDHV)

KITS / ACCESSORIES Model/Item No.(EAN-Code 8590875+EAN)	X-5401223	X-5401224	X-380470	X-380480	X-380490
DESCRIPTION	IRP Cable Set	IRP300 Frame Kit	IRP300 Kit (IRP300 + Dimplex DTB-2R Controller)	IRP600 Kit (IRP600 + Dimplex DTE-2R Controller)	IRP850 Kit (IRP850 + Dimplex DTE-2R Controller)
EAN	034009	046903	n/a	n/a	n/a
Output (kW)	n/a	n/a	0.3	0.6	0.85
Height (mm)	n/a	625	n/a	n/a	n/a
Width (mm)	n/a	625	n/a	n/a	n/a
Depth (mm)	n/a	30	n/a	n/a	n/a
Weight (Kg)	0.159	1	n/a	n/a	n/a
Packaging Details					
Height (mm)	n/a	650	n/a	n/a	n/a
Width (mm)	n/a	640	n/a	n/a	n/a
Depth (mm)	n/a	40	n/a	n/a	n/a
Packed Weight (Kg)	n/a	1.4	n/a	n/a	n/a
Pallet Quantity (2.4m high)	0.175	80	n/a	n/a	n/a


Product Description

The Dimplex IRP panel heater range utilises the latest in Far-Infrared technology to ensure a comfortable and precise heat delivery. It's low wall projection, with a depth of 30mm makes this a sleek and stylish way to heat your space.

Key Features

- Sleek and stylish design,
- Can be wall or ceiling mounted
- Heats objects in the room with the latest Far-Infrared technology
- Economic heat delivery
- Must be used in conjunction with a Dimplex DTB-2R controller
- Ceiling cable set and IRP300 false ceiling frame kits available as accessories.

Dimensions

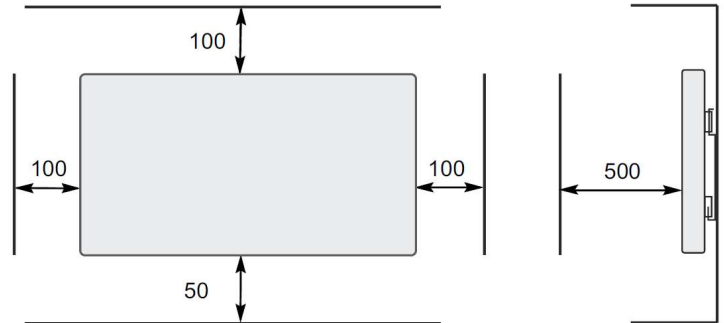

Model/Item No.(EAN-Code 4015627+EAN)	X-378420	IRP300	X-378430	IRP600	X-378440	IRP850
EAN	378421		378438		378445	
Output (kW)	0.3		0.6		0.85	
Height (mm)	592		592		800	
Width (mm)	592		1192		1192	
Depth (mm)	30		30		30	
Weight (Kg)	5		9.4		12.6	
Packaging Details						
Height (mm)	620		620		850	
Width (mm)	610		1250		1250	
Depth (mm)	60		60		80	
Packed Weight (Kg)	6.1		11.4		15.2	
Pallet Quantity (2.4m high)	40		20		15	