



Part number

PESW 1664 SV

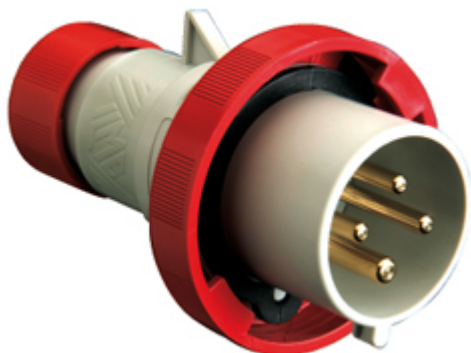

mobile plug, PLUSO series, SQUICH® quick connection, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V, straight

Product description

Product type	plug mobile
Series	PESW....SV, PLUSO
Connection type	SQUICH® quick connection
N. of poles	3 poles + 
Clock position	6
Specification	straight

Technical data

Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP66/IP67

Further technical details

Weight	171,00 g
Operating temperature range (min, max)	-40°C ... +125°C

Approvals / Standards

Reference standard EN 60309-1 and -2

General ordering information

EAN13 code 8015747187251

Packaging Information


Packaging length	330,00 mm
Packaging height	175,00 mm
Packaging width	295,00 mm
Packaging weight	3,38 kg
Packaging volume	17,04 dm ³
Packaging description	Carton box
Packaging quantity	20 Pcs
Packaging EAN code	8015747187282

Part number

PESW 1664 SV



Catalogue drawings

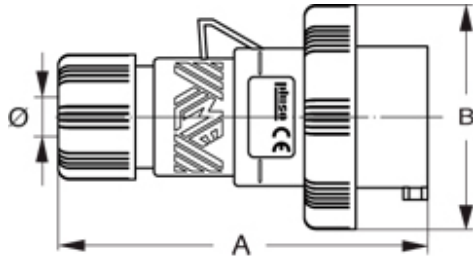

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PES...SV types (IP44), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure
- PESW...SV types (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- Terminals with retained screws
- IP44 and IP66/IP67 degrees of protection (EN 60529)

Connection

