

JC091006

Niteflood® LED Floodlights

Niteflood™ LED Floodlight 30W IP65 4000K Black +PIR

Features & Benefits

- Up to 112 LpcW
- IP65 protection against dust and moisture
- 60° angled bracket for ease of installation
- Breather gland incorporated to protect against condensation
- Opal glass for reduced glare
- Supplied pre-wired with 800mm flex
- Driverless technology
- Manual override
- This product contains a light source of energy efficiency class E



BEAM



CLASS I



CRI:RA



RATING



SENSING



WARRANTY

General Information

Mounting

Wall Mount

Environment

Exterior

Product Group

LED Floodlights

Color Finish

Black

Product Shape

Rectangular

Product Range

Niteflood®

Overall Dimensions

174 x 173.6 x 105.8

Width (mm)

173.6

Height (mm)

174

Depth (mm)

105.8

Product Weight(kg)

0.552

Light Source

LED

To operate the manual override function: Turn the power OFF/ON/OFF/ON within 5 seconds.To return to Automatic PIR detection mode: Turn off power for 10 seconds, then turn power ON.If the power is off for longer than 15 seconds the floodlight will light up for 5 seconds before activating automatic PIR detection mode.

Additional Information

Recommended Product Location	Exterior Wall Mount for security lighting
Method Of Fix	Screws/Rawl plugs
Fixing Centres	See profile drawing
IP Rating	IP65
Origin of manufacturer	China
Warranty	2 years standard warranty extends to 3 years when registered within the first year of purchase (See Website for terms and conditions)
Mounting Height	2.5m max
Driver Manufacturer	No driver, mains LED Chips
LED Manufacturer/Type	Smalite 2835

Electrical

Voltage Rating	220-240
Operating Frequency Hz	50/60Hz
Luminaire Circuit Wattage	30
Class	I
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Live, Earth, Neutral

Thermals

Operating Temperature Range °C	-10 to 30
--------------------------------	------------------

Performance Data

LED Life (Hours)	54000
------------------	--------------

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Energy Rating	This product contains a light source of energy efficiency class E
Actual Lumen Output	3200
Lumens Per Circuit Watt	107
Standard Deviation Colour Matching - SDCM	< 5
Color Rendering Index	80-89
CRi: Ra	83
Correlated Color Temperature	4000
Beam Angle °	100
LOR (Light Output Ratio) %	100
Photometry Available	Yes, available on request

Controls and Sensors

Detection Distance	5-10m
Detection Motion Speed	0.6~1.5m/s
Detection Range	180°

Installation Height	1.8-2.5m
Power Consumption	< 0.9W
Time Delay	10s to 7mins

Construction



Primary Material	Aluminium
Outer Diffuser	Opal toughened glass
Heat Sink	Aluminium

Packaging

Product carton overall dimensions(cm)	17.7 x 5.7 x 20.2cm
Product Packaged Weight(kg)	0.63
Quantity Per Outer Carton	20
Outer carton(L)- cm	61.8
Outer carton(W)- cm	37.5
Outer carton(H)- cm	23.6
Outer carton Net weight- kg	11.04
Outer carton Gross weight- kg	12.06
Product Bar Code EAN-13 Number	5052544109706
Outer carton Bar Code ITF-14 Number	15052544109703

Standards & Approvals

Manufactured In Accordance To	BS EN 60598-2015,2-1,2-5
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

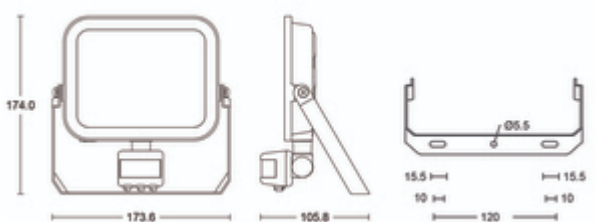



JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 166 [31/01/2023]