DATASHEET

Fully Populated 5+5+2 Metal Consumer Unit c/w MCB protection

Product Ref:

MMSB5+5+2/63ACT10MCB


Technical Features:

- Supplied complete with fully fitted and pre-wired 2 pole 100A 30mA incoming Isolator and 2 x 63A 30mA Type AC RCD devices, plus 10 x MCBs:
  3 x 6A MCBs B Curve, 2 x 16A MCBs B Curve,
  4 x 32A MCBs B Curve and 1 x 40A MCB B Curve
- Ferruled cable ends for secure connections
- Fully enclosed metal construction body with drop-down metal cover. Raised keyholes for secure easy installation
- Multiple circular cable entry knockouts (M25, M32 and M40) plus rear aperture/rounded cable entries
- BS EN 61439-3 compliant



Product Specification

Voltage Rating	**230V**
Current Rating	**100A**
RCD Rating	**63A**
RCD Type	**Type AC**
IP Rating	**IP20**
Weight	**5.010kg**
Incoming Device	**100A Isolator**
Number of Outgoing ways	**10+2**
Number of Modules	**18**
Board Configuration	**5 + 5 + 2**
Cable Entry	**Knockouts (M25, M32 and M40)**
Supplied With	**1 x Isolator, 2 x RCD's and 10 x MCB's**
Type	**Split Load Board**
Mounting	**Surface**
Door Type	**Top Hinged**
Colour	**White**
Finish	**Polyester Powder Coated**
Material	**Steel**
Compliance	**UKCA, CE**
Guarantee	**1 Year**
Standards	**BS EN 61439-3**
Depth	**110mm**
Height	**235mm**
Width	**377mm**

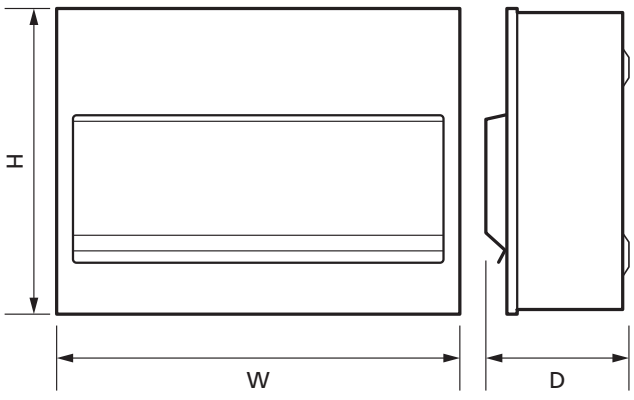

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.