

INCEPTOR® SLATE BACKLIT UGR

Technical Specification

Product Code: OXS12X3

Description: 22-30W 1200mm x 300mm Backlit Low-Glare LED Panel CCT Switchable White

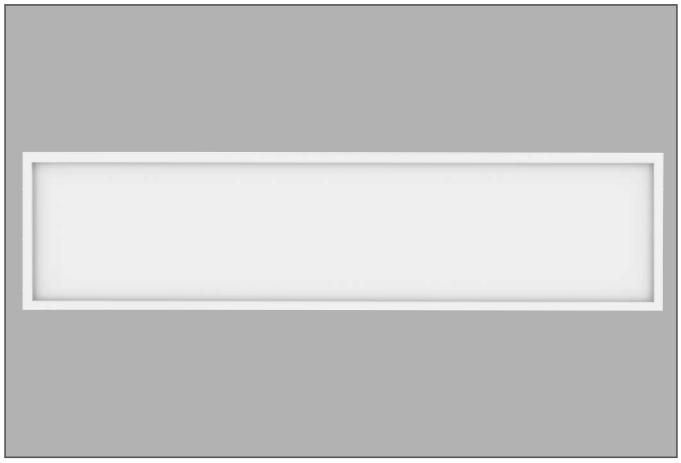

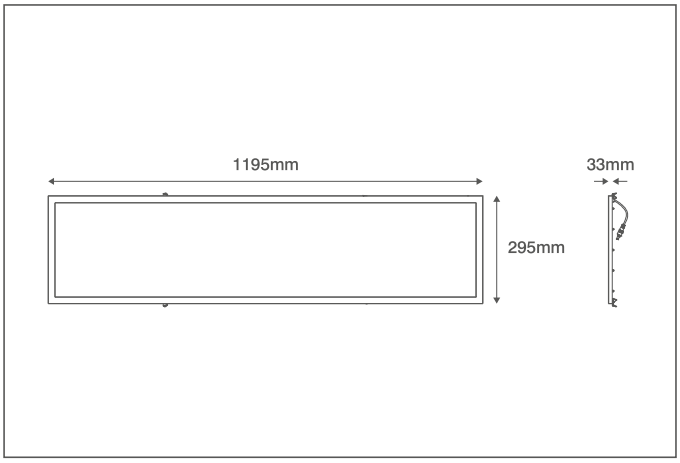

General Information

Dimensions (mm)	1195 (L) x 295 (W) x 33 (D)
Materials	Frame: Powder Coated Aluminium; Diffuser: Polystyrene; Back Cover: Powder Coated Steel
Bezel Colour	White (RAL9003)
Product Weight (Kg)	2
Ingress Protection	IP44
Impact Rating (IK)	06
Flammability Rating	TP(a)
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	II
Circuit Wattage (W)	22/30
LED Wattage Options (W)	22/30
Input Current (mA)	0.17
Inrush Current	<40A (350uS@220V~)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	40
Maximum Critical Temperature (°C)	+70
Prewired Flow™ Connector	3 Pole CT105-F Push-fit Terminals

Luminaire Output

Colour Temperature (K)	4000	5000	6500
LED Wattage		22	
Typical Luminous Flux (lm)	3150	3150	3150
Efficacy (lm/W)	143	143	143
LED Wattage		30	
Typical Luminous Flux (lm)	4200	4200	4200
Efficacy (lm/W)	140	140	140
Beam Angle (°)		90	
Colour Rendering Index (CRI)	>80		
Unified Glare Rating (UGR)	<19		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	No

Compatible Accessories

OVCGMF0001 - 240V~ 29-48W Multi-function Dimmable Constant Current LED Driver
OVSUSP732 - Suspension Wire Kit
OVSURF12X3 - 1200mm x 300mm Surface Frame Kit
OEP4 - 3 Hour Emergency Pack
OEP4ST - 3 Hour Self-Test Emergency Pack

Additional Information

Suspension hooks pre-fitted to the back

ON SITE WARRANTY | Pre-wired flow™ Connector | UGR | FLAME RESISTANCE TP(a) | IP44 | WARRANTY 5 YEARS

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | **W:** oviaUK.com


Catalogue | Section | DoC | Installation

INCEPTOR® SLATE BACKLIT UGR


Technical Specification

Product Code: OXS12X3


Description: 22-30W 1200mm x 300mm Backlit Low-Glare LED Panel CCT Switchable White

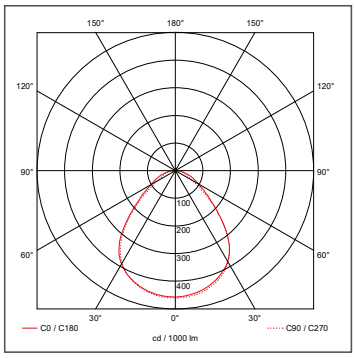


22W - 4000K

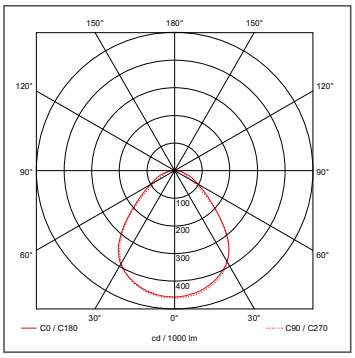


22W - 5000K

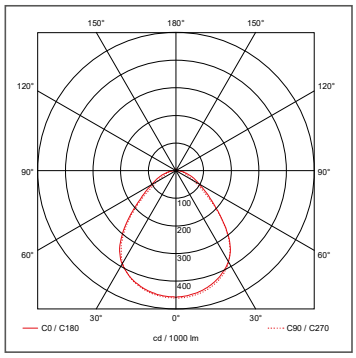


22W - 6500K

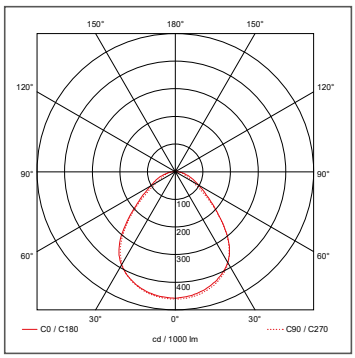

30W - 4000K

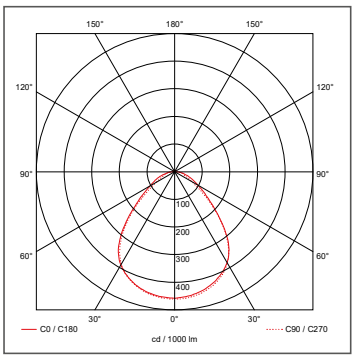

30W - 5000K

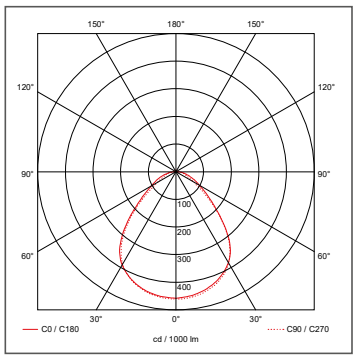

30W - 6500K

ON SITE WARRANTY

Pre-wired flow™ Connector

IP44

5 YEAR WARRANTY

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | **W:** oviaUK.com

Catalogue | Section | DoC | Installation