



MASTER VALUE LEDspot PAR

CorePro LEDspot ND 9-60W 927 PAR38 25D

With its robust design and warm-white beam of light, these new-generation PAR lamps are ideal for general lighting and spot lighting in the hospitality industry. It's a dimmable solution. They are especially suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. The product offers more energy saving comparing with normal LED spots.

Product data

General information	
Cap-Base	E27 [E27]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	25000X
Flux measurement reference	Narrow Cone
Tier	CorePro
Light technical	
Color Code	927 [CCT of 2700K]
Beam Angle (Nom)	25 °
Luminous Flux (Nom)	750 lm
Luminous Intensity (Nom)	3600 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	83 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %


Luminous Flux in 90° Cone (Rated)	750 lm
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	9 W
Lamp Current (Nom)	55 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Bulb Finish	Clear

MASTER VALUE LEDspot PAR

Bulb Shape	PAR38 [PAR 4.75 inch/121mm]
Approval and application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	9 kWh
EPREL Registration Number	1121744
Product data	
Full product code	871951444342600

Order product name	CorePro LEDspot ND 9-60W 927 PAR38 25D
EAN/UPC - Product	8719514443426
Order code	929003485302
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929003485302
Net Weight (Piece)	0.300 kg


Dimensional drawing




CorePro LEDspot ND 9-60W 927 PAR38 25D

Product	D	C
CorePro LEDspot ND 9-60W 927 PAR38 25D	122 mm	134 mm

Photometric data




Accent Lighting Spots

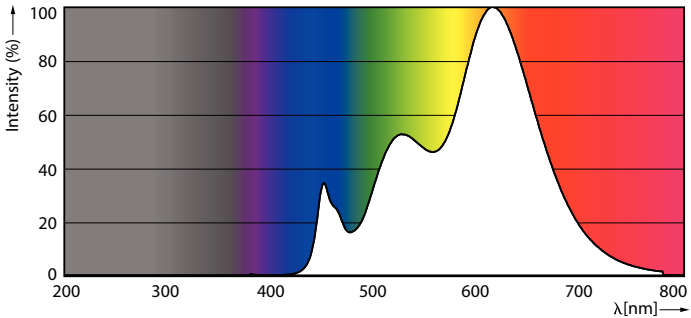

Spectral Power Distribution Colour


MASTER VALUE LEDspot PAR

Photometric data




Light Distribution Diagram

Lifetime

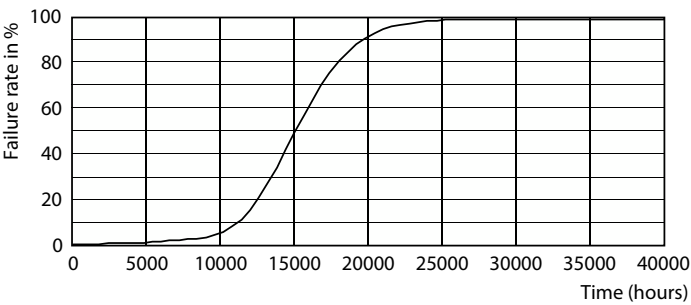

Life Expectancy Diagram

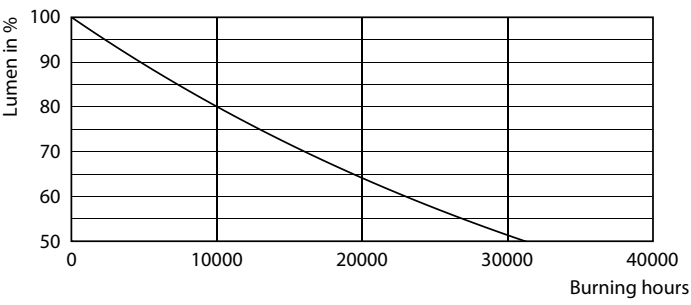

Lumen Maintenance Diagram

