
define®

Technical Specification

Product Code: FPPN571UWH **Description:** 13A Ingot 1 Gang Switched Socket Outlet With Single 2.1A USB Outlet



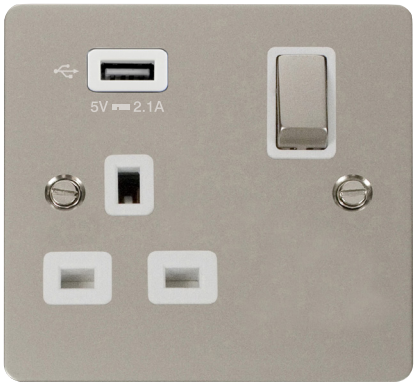

General Information

Plate Dimensions	86mm (W) x 86mm (H) x 1.3mm (D)
Dimensions With Gasket	86mm (W) x 86mm (H) x 3mm (D)
Plate Design & Finish	Flat Plate Pearl Nickel
Insert Colour	White
Materials	Front Plate: Stainless Steel Housing: Nylon Terminals: Brass Contacts: Silver "on-lay" Copper / Brass PCB: Mixed Components Insert: Urea Switch Cover: Stainless Steel Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel
Maximum Voltage	250V~ 50Hz
Load Rating	13A
Plate Fixing Centres	60.3mm
Terminal Size	5mmø
Terminal Torque	1.2Nm
Terminal Capacity	3 x 2.5mm² or 2 x 4mm²
Single Pole	Yes
Twin Earth Terminals	Yes
USB Charging Output Total	5V DC, 2.1A
Number Of USB Outputs	1
USB Type	USB Type "A"
USB Standby Current	2mA
Product Markings	USB 5V 2.1A
Ingress Protection	IP20
Back Box Depth	35mm Minimum
Termination Type	Screw
Operational Temperature	-5°C to +40°C
Warranty	10 Years, 1 Year Electronics
Standards	BS 1363-2: 2016 +A1: 2018 BS EN 62368-1: 2014, BS EN 62680-1-1: 2015

Additional Information

The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

Errors & Omissions excluded.
Specification is subject to change without notice.