

## WISKA COMBI 308

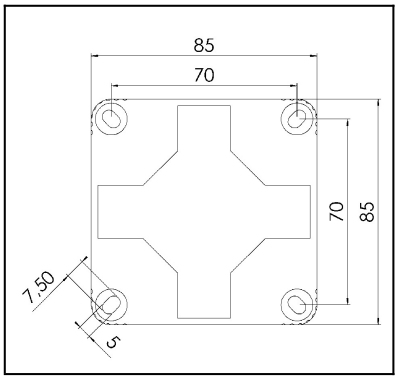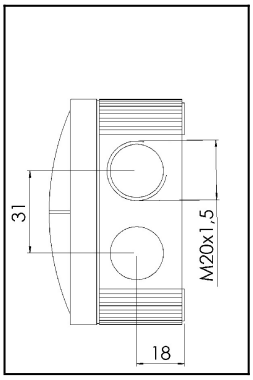


| | |
|---|---|
| **Protection class to EN 60 529:** | IP 66 |
| **Flame protection:** | Glow wire test 750 C acc. to EN 60695-2-11 |
| **Temperatures during installation:** | -5°C to 60°C |
| **Temperature range of material:** | -30°C to 100°C, intermittent up to approx. 120°C |
| **Voltage:** | 400 V |
| **Material:** | Polypropylene, reinforced glass fibre; Sealing: thermoplastic elastomere |
| **Terminals/poles:** | 4 mm² |
| **Fixing:** | With mounting clip or 4 internal openings outside of the sealing area |
| **Equipment:** | 8 elastic self-sealing membranes for cable entry without mechanical devices<br>- 8 integrated M 20 threads, no locknuts necessary<br>- 4 captive quick-release lid screws<br>- Incl. mounting clip for snap-on fixing<br>- Colour RAL 7035 light grey<br>- .../S = black<br>- .../W = white<br>- .../DR = grey box with red cover<br>- .../ESKV = incl. 3 pcs. ESKV M 20 (*Sealing range 6 - 13 mm) |
| **Accessories:** | - DN 48: screwing sleeves for fixing profile rails, WISKA-No. 10060372<br>- DIN RAIL KIT 108, 308: Rail TS 15 + Fixing material, WISKA-No. 10060362<br>- EC 308 Earthing plate: WISKA No. 10101473<br>- Adapter 308/1210: WISKA No. 10101477 |

| Type | WISKA-No. | | mm | | L x B x H external / außen mm |
|---|---|---|---|---|---|
| COMBI 308/leer | 10060400 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/leer/S | 10060581 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/leer/W | 10060610 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/leer/DR | 10060480 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/ESKV | 10060403 | 5/100 | 3 - 12* | | 85 x 85 x 51 |
| COMBI 308/5 | 10060401 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/5/S | 10060580 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/5/W | 10060611 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/FK 150 | 10060530 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/FK 230 | 10060520 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| COMBI 308/FK 250 | 10060521 | 5/100 | 3 - 12 | | 85 x 85 x 51 |
| DIN RAIL KIT 308 | 10060362 | 1 | | — | -- |

© 2012 WISKA Hoppmann & Mulsow GmbH
Kisdorfer Weg 28
D-24568 Kaltenkirchen
Phone: +49 (0)4191 / 508-100
Fax: +49 (0)4191 / 508-209